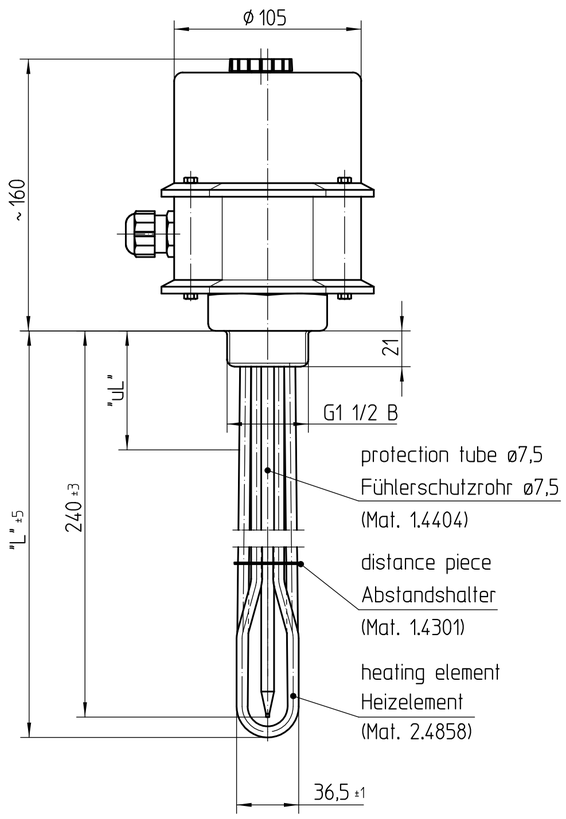

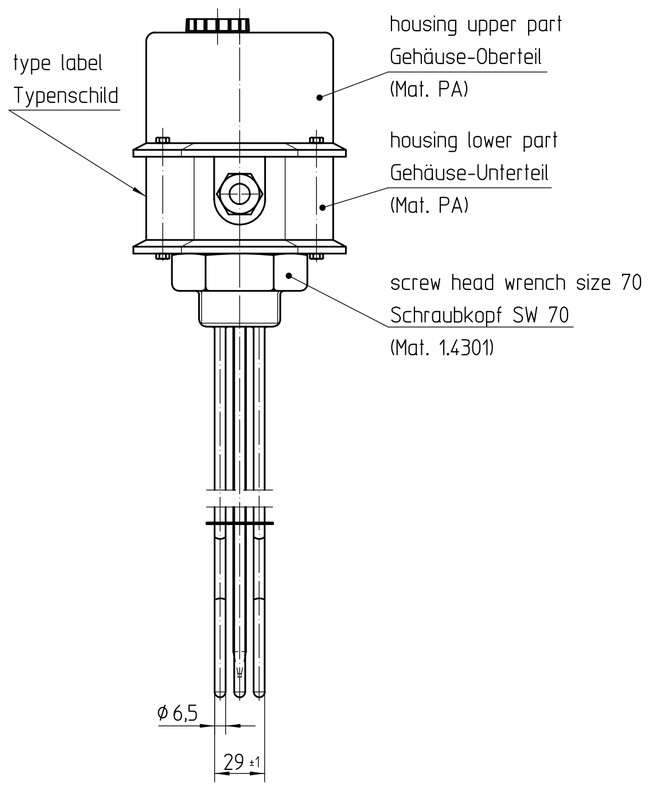

wiring diagram 10
Schaltplan 10



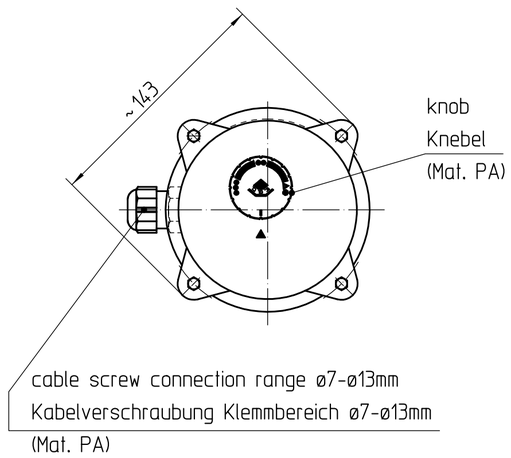

- Max. temperature of sealant in area of tube end: ST 110°C
  Max. Temperatur der Abdichtung im Bereich Rohrende: ST 110°C
- Max. temperature of tube surface: TT 150°C
  Max. Temperatur der Rohrmanteloberfläche: TT 150°C
- Tightening torques see mounting instruction for EGO Insert Heating Element
  Anzugsdrehmomente siehe Montagehinweis für EGO Einschraubheizkörper

Insert Heating Element with 3 heating circuits
Einschraubheizkörper mit 3 Heizkreisen

wattage Leistung	voltage Spannung	immersion depth "L" Eintauch-tiefe "L"	unheated length "uL" unbeheizte Länge "uL"	insert heating element-type Einschraubheiz-körper-Type	thermal cut-out + thermostat-type Regler-Begrenzer-Type	remarks Bemerkung
3000 Watt	3N ~400V	250 mm	95 mm	29.60830.023	55.60011.230 adjustment range /Einstellbereich TC/TR 31°C - 80°C TCO/STB 95°C - 8K anti freezing point Frostschutzstufe 12°C ±7K fail-safe / brucheigensicher	wiring diagram 10 Schaltplan 10

approval marks
Prüfzeichen

IP54 CE VDE DIN EN 60335-1
DIN EN 60335-2-73
VDE 0700-253

.	.	.
.	.	.
.	.	.
.	.	.
2	C03864	2022-10-27
1	C03173	2019-11-18
0	C03194	2019-06-05
Cha.	Information No.	Date
F.Rel.	C02608	2017-05-09

This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.

CAD	Date	Name
Create.	2022-09-28	HockM
Proc.	2022-09-28	HOCKM
Rel.	2022-10-27	MAIERA

Blank No. . EN Mat.No. .
Material .
.
Surface Texture ISO 1302
General Tolerances ISO 2768 v

Scale Unit mm
Scale 1:2.5

Designation
EGO Insert Heating Element
EGO EinschraubheizkûÑrper
.

E·G·O

Drawing No.	Sh.No.	Ver.	Stat.	Sheets	Doc.	Ex.Doc.
29.60830.023	001	04	F	.	.	.

Origin . Repl.for . Repl.by . Ref. .